


Flamex B-F H

PU suction and transport
hose, hardly inflammable

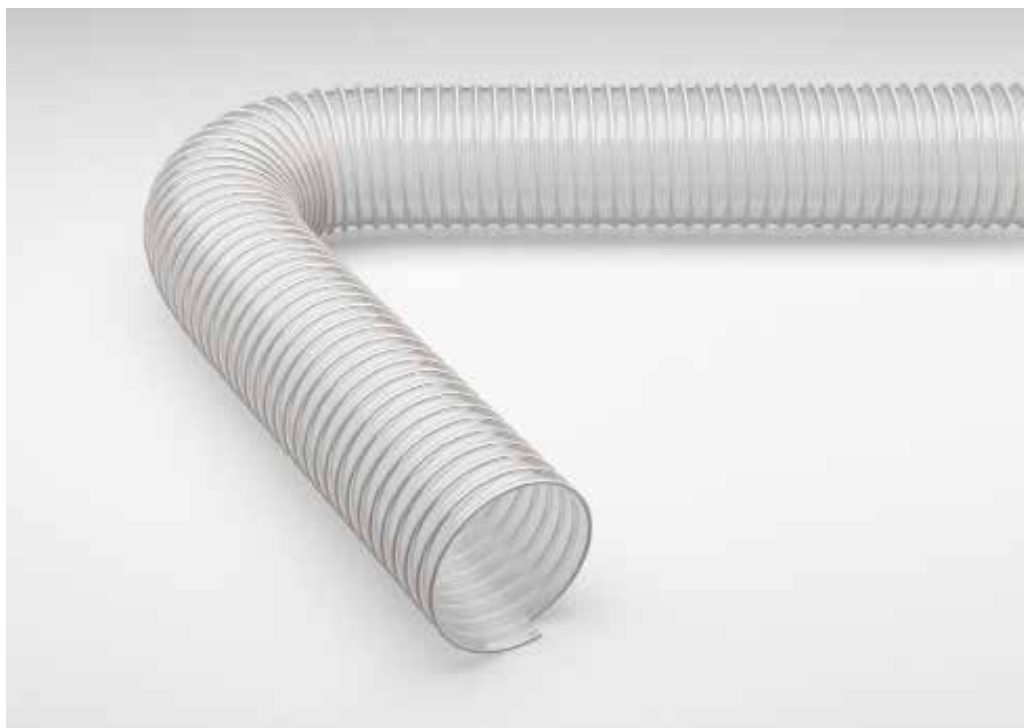

Material

wall: polyester polyurethane
spiral: white PVC coated steel helix
wall thickness between spirals approx. 0.7 mm

Applications

- Extraction of sawdust and woodchips
- Woodworking machinery
- Flexible connection for woodwaste outlets
- Protection hose against mechanical pressure

Properties

- extremely flexible
- highly abrasion resistant
- heavy duty
- microbe resistant
- compressibility approx 3:1


Temperature Range

- -20°C to +70°C
- peaks to +90°C

Flamex B-F H

DN	op. pressure c. bar	vacuum c. mmWC	bend radius c. mm*	outer Ø c. mm	weight c. kg/m	article no.	stock length
102	0.50	1000	75	112	0.7	310H-100-1000	10
127	0.40	1000	90	135	1.0	310H-125-1000	10
152	0.35	750	100	160	1.2	310H-150-1000	10
160	0.35	750	105	170	1.4	310H-160-1000	10
203	0.25	750	125	212	1.6	310H-200-1000	10
229	0.25	700	150	240	1.8	310H-225-1000	10
254	0.22	650	200	265	1.9	310H-250-1000	10
304	0.20	600	250	315	3.0	310H-300-1000	10


All data refers to a media and ambient temperature of +20 °C
 * refers to the inside of the hose
 Available from stock in the above listed lengths and sizes.
 Available on request in other lengths, sizes and colours, with print.
 Subject to technical changes and colour deviations.




Hose Reducer,
symmetrical



Combiflex PU Cast-On
Connectors, Food



Heat-Shrink Cuff



Hose Connector



Master-Grip Hose Clamp,
screwable